

08/18/00

A/

BAKER BOTTS LLP

30 ROCKEFELLER PLAZA
44TH FLOOR
NEW YORK, NEW YORK
10112-4498
212.705.5000
FAX 212.705.5020

AUSTIN
BAKU
DALLAS
HOUSTON
LONDON
MOSCOW
NEW YORK
WASHINGTON

Appln. Trans.
PATENT

**UTILITY PATENT
APPLICATION
TRANSMITTAL**

*(Only for new nonprovisional
applications under 37 CFR 1.53(b))*

Attorney Docket No. 33428-PCT-USA-A

First Named Inventor Noël Morel

Express Mail Label No. EK839858746US

Total Pages

August 17, 2000

BY EXPRESS MAIL - Label No. EK839858746US

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

Sir:

Enclosed herewith for filing is a patent application of Noël Morel entitled A JUNCTION OF A TREAD
WITH THE SIDEWALLS OF A TIRE

which includes:

<input checked="" type="checkbox"/> Specification	<u> 7 </u> Total Pages
<input checked="" type="checkbox"/> Claims	<u> 2 </u> Total Pages
<input checked="" type="checkbox"/> Abstract	<u> 1 </u> Total Pages
<input checked="" type="checkbox"/> Drawing(s)	<u> 2 </u> Total Sheets
<input checked="" type="checkbox"/> formal	
<input type="checkbox"/> informal	

☒ Combined Declaration and Power of Attorney Total Pages

☐ Newly executed (original or copy)

☒ will follow

(for continuation/divisional only - must be filed to avoid surcharge for late filing)

If a continuing application, check appropriate box:

☒ Continuation ☐ Divisional ☐ Continuation-In-Part (CIP)
of prior application No. PCT/EP99/00906

☐ Amend the specification by inserting, before the first line, the following sentence:

"This is a ☐ continuation ☐ divisional ☐ continuation-in-part
of copending application Serial No. filed ."

08/16/00
 13906 U.S. PTO

Appln. Trans.
 PATENT

Attorney Docket No. 33431-PCT-USA-A

- ☒ An Assignment of the invention to Compagnie Generale des Etablissements Michelin - Michelin et Cie.
☐ is attached. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
☒ will follow.
☐ has been filed in the prior application
- ☐ Small Entity Statement(s) **ENCLOSED**.
☐ Small Entity Statement filed in prior application. Status still proper and desired.
- ☐ Information Disclosure Statement (IDS) PTO-1449
☐ Copies of IDS Citations.
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard
- ☐ Other _
- ☐ Cancel in this application original claims _ of the prior application before calculating the filing fee.

The filing fee has been calculated as shown below:

FOR	(Col. 1) No. Filed	(Col. 2) No. Extra	Small Entity Rate	Fee	OR	Other Than A Small Entity Rate	Fee
Basic Fee							
Total Claims	4	-20 = 0	x 9 =	\$0.00	x 18 =	\$690.00	
Ind. Claims	1	-3 = 0	x 39 =	\$0.00	x 78 =	\$0.00	
Multiple Dependent Claim			+ 130 =		+ 260 =		
			Total	<u>\$0.00</u>		<u>\$690.00</u>	

* If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

Fee Payment Being Made:

- ☐ Enclosed
- ☐ Basic filing fee \$690.00
- ☐ Recording Assignment \$0.00
 [\$40.00; 37 CFR 1.21(h)]
- Total Fees Enclosed \$690.00

Appln. Trans.
PATENT

Attorney Docket No. 33431-PCT-USA-A

☒ A check in the amount of \$690.00 to cover filing fee is enclosed.

Priority

☒ Priority of application Country France, Appln. No. 98 02168 filed February 20, 1998 is claimed under 35 U.S.C. 119.

☒ Certified Copy of Priority Document(s) Country France, Appln No. 98 02168, filed Feb. 20, 1998.

☒ is/are attached ☐ will follow ☐ has been filed in the parent application S/N .

☒ The Commissioner is hereby authorized to charge payment of any additional filing fees required under 37 CFR 1.16, 1.17, and 1.21(h) associated with this communication or credit any overpayment to Deposit Account No. 02-4377. Two copies of this sheet are enclosed.

BAKER BOTTS L.L.P.


By Frederick C. Carver

PTO Registration No. 17,021

Enclosures

BAKER BOTTS L.L.P.
30 ROCKEFELLER PLAZA
NEW YORK, NEW YORK 10112

TO ALL WHOM IT MAY CONCERN:

Be it known that I, NOËL MOREL, a citizen of France, whose post office address is 4 Impasse Pedoux, F-63530 Enval, France, have invented an improvement in

A JUNCTION OF A TREAD
WITH THE SIDEWALLS OF A TIRE

of which the following is a

SPECIFICATION

BACKGROUND OF THE INVENTION

This is a continuation of PCT/EP99/00906 filed on February 12, 1999.

The invention relates to a tire having a carcass reinforcement, preferably a radial one, intended to be fitted more particularly on a passenger vehicle.

In addition to the carcass reinforcement, which is anchored within each
5 bead to at least one bead wire, said tire comprises radially to the outside of said carcass reinforcement a crown reinforcement composed of at least two so-called working crown plies formed of inextensible reinforcement elements, which are parallel to each other within each ply and are crossed from one ply to the next, forming angles which may be

between 10° and 45° with the circumferential direction. The tread, which is arranged radially to the outside of said crown reinforcement, is joined to the two beads of the tire by means of two sidewalls on either side of the equatorial plane.

As is widely known and used, the junction with the shoulders of the tire,
5 between the rubber mix of the tread and the two rubber sidewall mixes, can be brought about in two ways. A first method consists in folding the radially upper edges of the sidewall mixes over the axially outer edges of the tread mix. Said method, when laying the sidewall mixes on the cylindrical shaping drum for the non-vulcanized carcass blank, requires the non-adhesion of the upper edges of the sidewall mixes, then the folding of
10 said non-adhering edges on to the wings of tread mix during the finishing of the non-vulcanized tire blank. The operations referred to above may in some cases be tricky.

A second method frequently used consists firstly of folding down the wings of tread mix over the upper edges of the sidewall mixes, said edges, during the building of the tire blank, being glued to the radially subjacent mixes. The junction
15 between the tread mix and the sidewall mixes, which is on the outer wall of the sidewall in the form of a more or less regular circle, is then covered with a layer of rubber mix or joint cover, of a quality close to that of the sidewall mixes. This latter solution permits good strength of the junction and good life of the tire at this level, but requires the laying of an additional product, and therefore a certain disadvantage in terms of material and
20 production costs.

Despite the possible tapering of the tread wings so as to facilitate the folding over thereof, since the materials used for the tread mixes and sidewall mixes are

generally very different and the mechanical stresses due to the loading of the tire in the contact area and imposed on the shoulders of said tire are high, it has not been possible to dispense with the use of the joint cover over the junction between the tread and sidewalls, since the life of the junction is not judged sufficient for intensive, severe highway use.

5

SUMMARY OF THE INVENTION

The object of the invention is to dispense with the use of the joint cover while using the second method of building the tire blank.

The tire according to the invention, comprising a carcass reinforcement anchored within each bead to a bead wire, a crown reinforcement and a tread joined to two beads by means of two sidewalls, the axially outer edges of the single mix of the tread being folded over on to the radially outer edges of the rubber mixes of the sidewalls, is characterized in that the circular junction between the sole rubber tread mix and the rubber sidewall mix is positioned on the axially outer wall of the tire such that its radius R_C lies firstly between $0.9 R_S + 0.1 R_B$ and $0.8 R_S + 0.2 R_B$ and secondly between R_{SS} and $0.9 R_{SS} + 0.1 R_B$, R_S being the equatorial crown radius of the tread, R_{SS} the equatorial radius of the center line of the carcass reinforcement and R_B the radius of the bead seat measured on the line perpendicular to the axis of rotation of the tire passing through the center of gravity of the cross-section of the bead wire.

Such positioning permits a serious reduction in the deformation which the circular junction between the tread mix and the sidewall mix undergoes, and consequently substantially improved strength of the bond.

Preferably, the circular junction between the mixes in question is close to at least one circumferential groove or channel, the mean radius R_R of which is between $R_C + 10$ mm and $R_C - 10$ mm, and the depth of which is between 10 and 30% of the total sidewall thickness at the radius R_R . It is advantageous for the channel to have a mean
5 radius of between R_C and $R_C - 10$ mm in order to have maximum effectiveness. The cross-section of said groove may be semicircular, or alternatively may, when viewed in meridian section, have a shape which is a succession of arcs of a circle.

The characteristics of the invention will be better understood with reference to the following description, which refers to the drawings which illustrate in
10 non-limitative manner examples of embodiments of the invention.

DESCRIPTION OF THE DRAWINGS

Figure 1 is a diagram, viewed in meridian section, of a tire according to the invention, and

Figure 2 is a diagram, viewed in meridian section, of a variant of the shape
15 of the channel.

DESCRIPTION OF PREFERRED EMBODIMENTS

The tire of dimension 175/70 R.13 comprises a carcass reinforcement formed of a single ply 1 of radial reinforcement elements which are textile cables, such as cables of aliphatic polyamide, or of PET, or of rayon. Said ply 1 winds within each bead
20 around a bead wire 2 of braided type to form an upturn 10. The carcass reinforcement 1

is surmounted radially to the outside by a crown reinforcement 3 composed of two working plies 31 and 32 formed of inextensible metal 6x23 NF cables made of steel which are parallel to each other within each ply and are crossed from one ply 31 to the next 32, forming an angle α of 22° with the circumferential direction of the tire. The edges of said crown reinforcement 3 are separated from the carcass ply 1 by rubber profiled elements 7, whereas the edges of the working plies 31 and 32 are separated from each other by rubber wedges 8 of suitable quality. The tread 4 radially surmounting the crown reinforcement 3 is joined on either side of the equatorial plane XX' to a sidewall 5 via a junction J having on the axially outer wall of the tire a substantially circular trace C having a radius R_C . If the radius R_S of the circular trace on the equatorial plane XX' of the points of the tread 4 which are farthest from the axis of rotation of the tire, the radius R_{SS} of the virtually circular trace on the equatorial plane XX' of the points of the average surface of the carcass reinforcement 1, and the radius R_B of the bead seat measured in a plane parallel to the equatorial plane XX' and passing through the center of gravity of the section of the bead wire 2 are considered, the radius R_C is equal to 268 mm, or firstly equal to $0.83 R_S + 0.17 R_B$, given that R_S is equal to 289 mm and R_B to 163 mm, and secondly equal to $0.93 R_{SS} + 0.07 R_B$, given that R_{SS} is equal, for the dimension in question, to 275 mm.

Radially to the inside of the circular trace C there is arranged a groove 6 of semicircular cross-section, the central axis ZZ' of which, viewed in meridian section, intersects the lateral wall of the tire at a point of the radius R_R lower than the radius R_C by an amount equal to 6 mm. Said groove 6 has a depth, which in the present case

corresponds to a radius r , of 2.0 mm, which is equal to 25% of the thickness e of the sidewall of the tire, measured on the axis ZZ' and equal to 8 mm. The groove 6, which is close to the junction J, makes it possible additionally to reduce the deformations on the sidewall of the tire at the level of said junction between the tread mix and the sidewall mix.

Figure 2 shows another form of circumferential groove 6, which can be defined by the succession of two arcs of a circle viewed in meridian section: a first, radially upper, concave, arc of a circle, of radius r and of a length of between $\pi r/2$ and πr , extended tangentially by a second, convex, arc of a circle, the radius of curvature r' of which lies between r and R' , R' being the radius of curvature of the outer wall of the sidewall measured at the radius R_R , said second arc of a circle also being tangent to said outer wall. In the case described, the radius r is 2 mm, whereas the radius r' is 50 mm, R' being equal to 80 mm.

It is possible, if necessary, to add a second groove, of the same type as the groove 6, arranged radially to the outside of the junction J and substantially at the same radial distance from said junction.

Tests carried out on tires in accordance with the invention (Figure 1) demonstrate the good endurance of the junction between the tread and the sidewalls of the tire, both when traveling with an excess load and when traveling in ozone-containing conditions. The presence of a groove permits a reduction in the deformation to which the junction is subjected, and tires of this design have recorded mileages, before the

NY02:277308.1

I CLAIM:

1 1. A tire comprising a carcass reinforcement anchored within each
 2 bead to a bead wire, a crown reinforcement and a tread joined to two beads by means of
 3 two sidewalls, the axially outer edges of the single mix of the tread being folded over on
 4 to the radially outer edges of the rubber mixes of the sidewalls, characterized in that the
 5 circular junction J between the single rubber mix of the tread and the rubber mix of the
 6 sidewall is positioned such that its radius R_C on the axially outer wall of the tire lies
 7 firstly between $0.9 R_S + 0.1 R_B$ and $0.8 R_S + 0.2 R_B$ and secondly between R_{SS} and $0.9 R_{SS}$
 8 + $0.1 R_B$, R_S being the equatorial crown radius of the tread, R_{SS} the equatorial radius of
 9 the center line of the carcass reinforcement and R_B the radius of the bead seat measured
 10 on the line perpendicular to the axis of rotation of the tire passing through the center of
 11 gravity of the cross-section of the bead wire.

1 2. A tire according to Claim 1, characterized in that the circular
 2 junction J between the mixes in question is close to at least one circumferential groove or
 3 channel, the mean radius R_R of which is between $R_C + 10 \text{ mm}$ and $R_C - 10 \text{ mm}$, and the
 4 depth of which is between 10 and 30% of the total sidewall thickness at the radius R_R .


1 3. A tire according to Claim 2, characterized in that the cross-section
 2 of said groove is semicircular.

1 4. A tire according to Claim 2, characterized in that the cross-
2 section of the groove has a form defined by the succession of two arcs of a circle: a
3 first, radially upper, concave, arc of a circle, of radius r and of a length of between
4 $\pi r/2$ and πr , extended tangentially by a second, convex, arc of a circle, the radius of
5 curvature r' of which lies between r and R' , R' being the radius of curvature of the
6 outer wall of the sidewall measured at the radius R_R , said second arc of a circle also
7 being tangent to said outer wall.

COPIES OF THIS DOCUMENT ARE AVAILABLE FROM THE PATENT AND TRADEMARK OFFICE OF THE UNITED STATES DEPARTMENT OF COMMERCE

A tire having a carcass reinforcement, a crown reinforcement and a tread joined to two beads by means of two sidewalls, the axially outer edges of the single mix of the tread being folded over on to the radially outer edges of the rubber mixes of the sidewalls, and the circular junction J between the sole rubber mix of the tread and the rubber mix of the sidewall being positioned such that its radius R_C on the axially outer wall of the tire lies firstly between $0.9 R_S + 0.1 R_B$ and $0.8 R_S + 0.2 R_B$ and secondly between R_{SS} and $0.9 R_{SS} + 0.1 R_B$, R_S being the equatorial crown radius of the tread, R_{SS} the equatorial radius of the center line of the carcass reinforcement and R_B the radius of the bead seat.

1 / 2

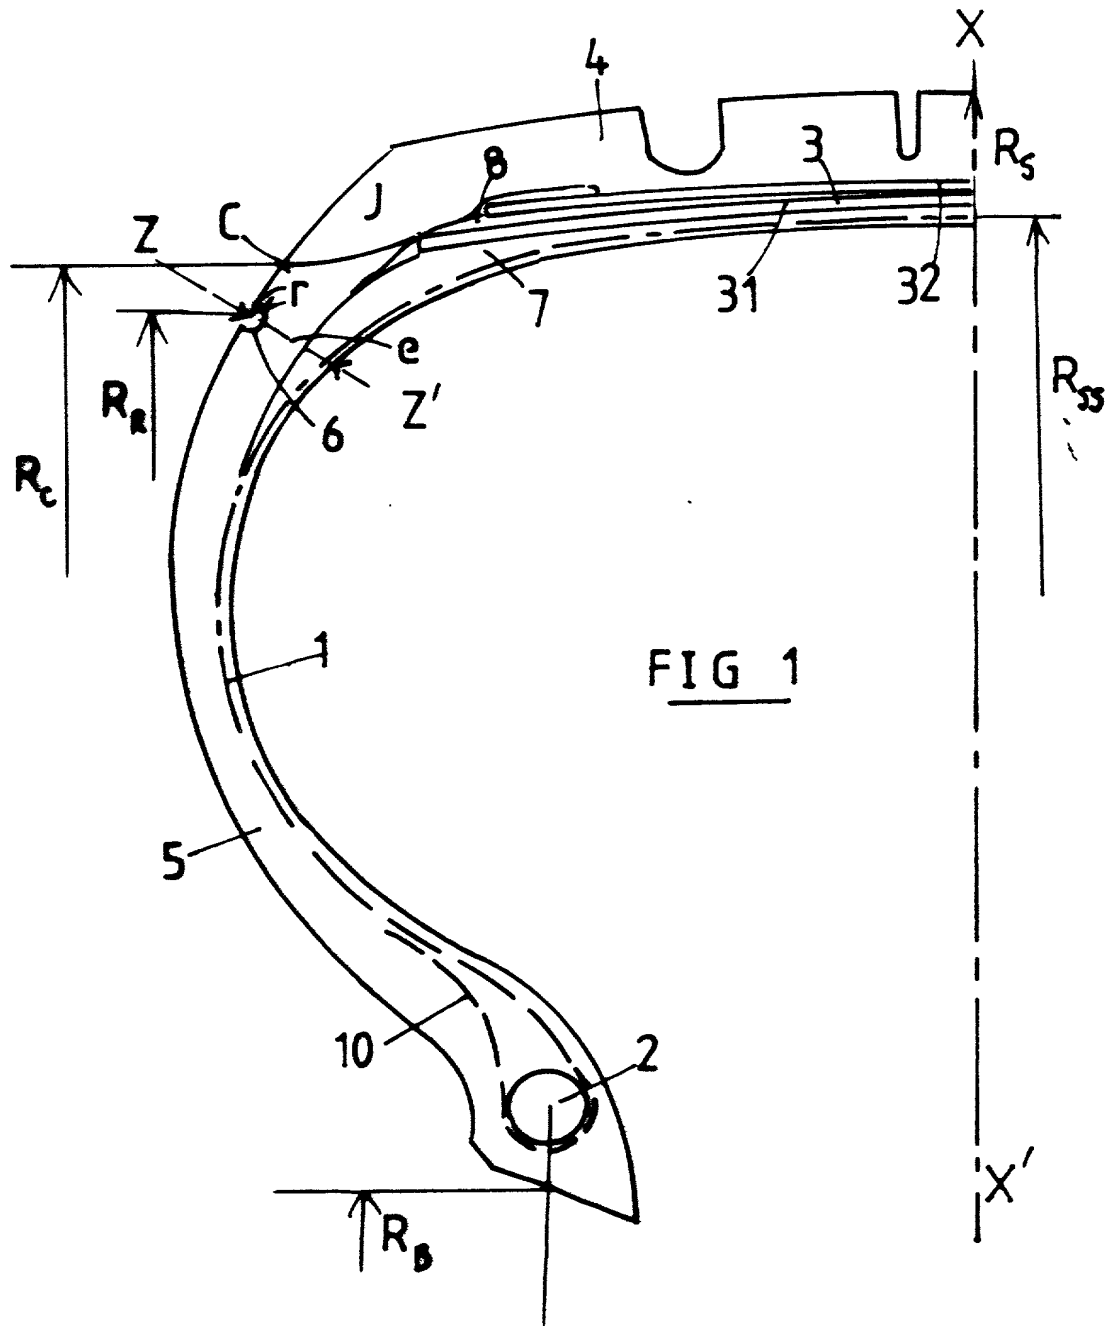

2 / 2

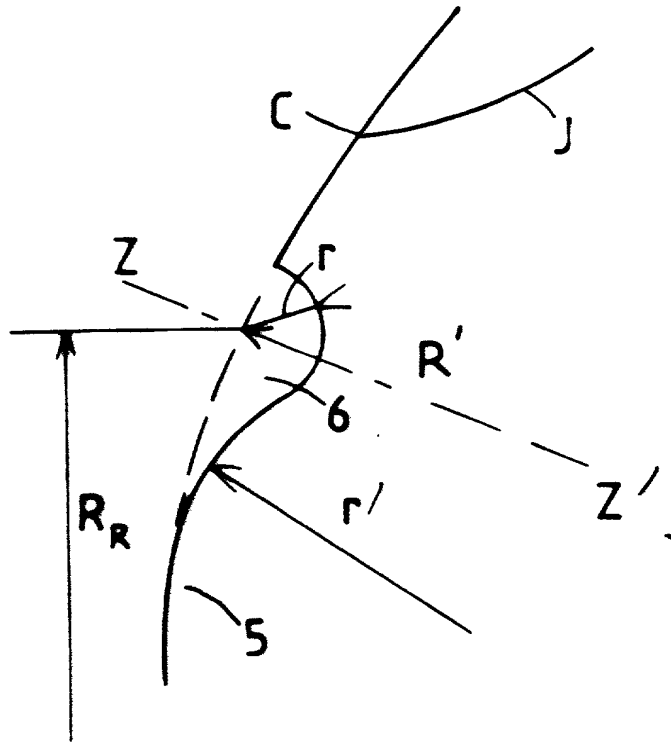


FIG 2